


# COMBI WALL

**Universal Larssen Interlocks  
Clutches or Connectors  
Grade S 355J2**  
in standard lengths  
of 8 m 11,8 m and 14 m

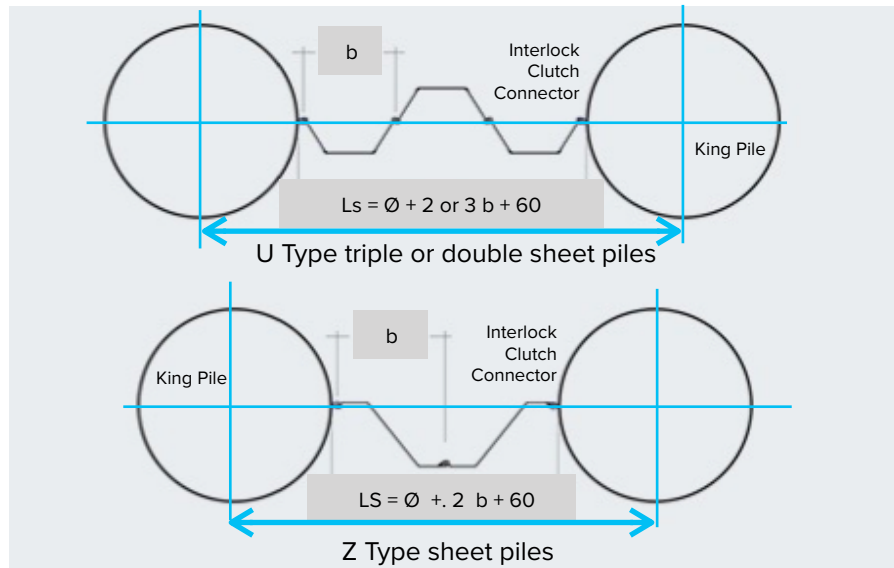

L	Interlock	For infill sheet piles	Thickness	M
mm			mm	kg/m
30	L 8	Fixed opening	9,5	8,47
30	E 22	Fixed opening	10,0	10,22
30	C 9	Fixed opening	9,5	9,00
20	E 21	Light easy to weld	12,0	6,30
20	C 6	Light easy to weld	11,5	6,00