


TUBULAR WALL

Locking Bars
Grade S 355J2
 in standard lengths
 of 8 m and 11,8 m

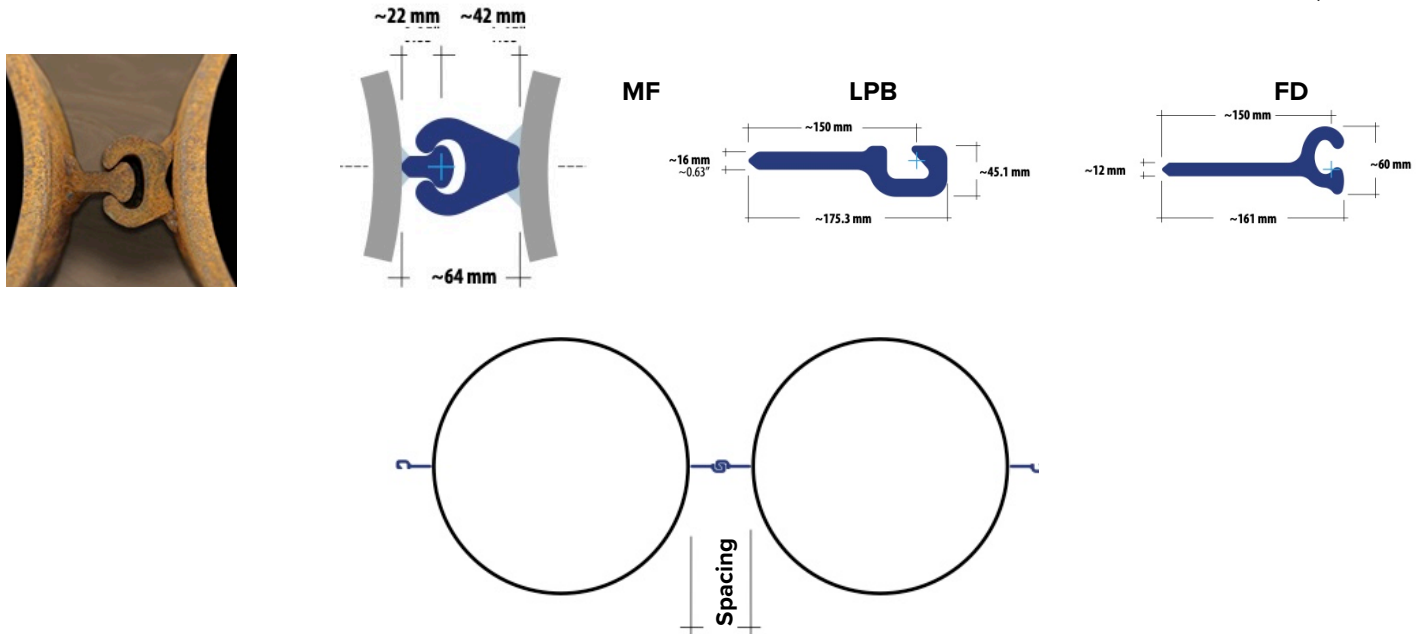

Spacing	Locking Bar	For pipe pile walls with	M	F	MF	Tensile Strength
mm			kg/m	kg/m	kg/m	kN/m
63	MF 63	High Tension ball/socket	4,76	10,70	15,46	2.533
64	MF 64	HT special for DTH driving	3,42	14,28	17,70	3.419
64	MF 64-IC	HT special for DTH driving	3,42	13,55	16,97	3.168
75	MF 75	High Tension ball/socket	4,76	14,28	19,04	3.419
75	MF 75-IC	High Tension ball/socket	4,76	13,55	18,31	3.419
130	MF 130	High Tension ball/socket	9,76	14,28	24,04	3.419
180	MF 180a	High Tension ball/socket	14,70	14,28	28,98	3.419
180	MF 180b	High Tension ball/socket	9,76	18,42	28,18	2.558
230	MF 230	High Tension ball/socket	14,77	18,42	33,19	2.558
100	LPB 100-10	Larssen	9,86	9,86	19,72	980
180	LPB 180-10	Larssen	12,94	12,94	25,88	1.026
180	LPB 180-12	Larssen	14,50	14,50	29,00	1.502
180	LPB 180-16	Larssen	22,40	22,40	44,80	1.848
248	LPB 248-12	Larssen	18,26	18,26	36,52	1.500
300	LPB 300-16	Larssen	29,65	29,65	59,30	1.828
180	FD 180	Very High Tension	17,42	17,42	34,84	5.843
300	FD 300-12	Very High Tension	13,80	21,40	35,20	6.312